



Figure 6-50
TYPICAL MEDIAN BARRIER DELINEATION AND CHANNELIZERS

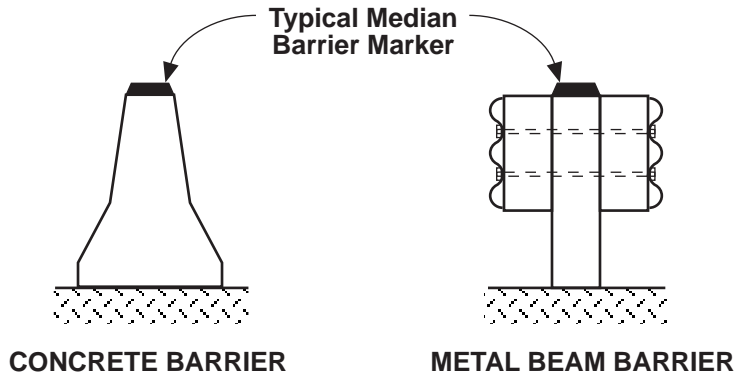

MEDIAN BARRIER DELINEATION

NOTE: The Median Barrier Marker spacing should correspond with the raised pavement marker spacing used on the left edgeline.

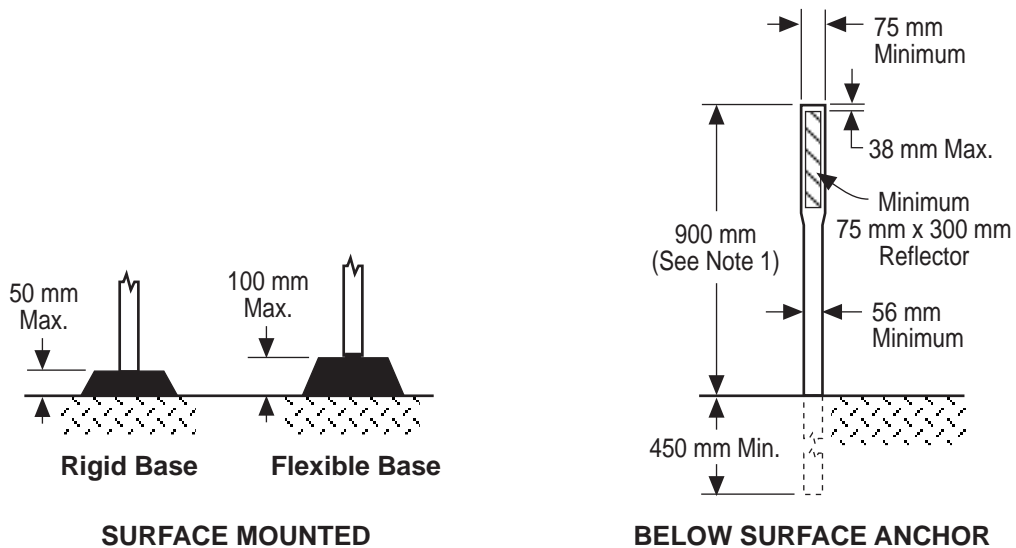

CHANNELIZERS

CHANNELIZER NOTES:

1. A minimum post height of 700 mm may be used at locations where speeds are 64 km/h or less.
2. Channelizer posts used in a construction or maintenance zone shall be orange with white reflectors. However, if the channelizers are to remain in place as a permanent roadway feature after the construction or maintenance period, the post shall be white and the color of the reflector shall conform to that of the pavement markings it supplements.

NOT TO SCALE